


Pompe Siphon manuelle PE Alimentaire - joint PE - Grand Modèle.


Cette pompe est adaptable sur bonde 2" pas du gaz. Si vous souhaitez l'adapter sur un autre filet, l'ajout d'un adaptateur sera nécessaire.

- Débit : 21 litres / minute.
- Longueur tube : 85 cm
- Longueur tube de refoulement: 120 cm
- Matière : PE

Applications :

Essence, kérosène, diesel, eau, liquide lave-glace, nettoyant pour freins, diluant, toluène, insecticides chimiques, produits chimiques agricoles, acide nitrique 35 %, acide chlorhydrique 35 %, acide sulfurique 35 %, acide acétique 35 %, huile moteur (Ex.5W31), huile hydraulique (Ex.AW46), lubrifiants.



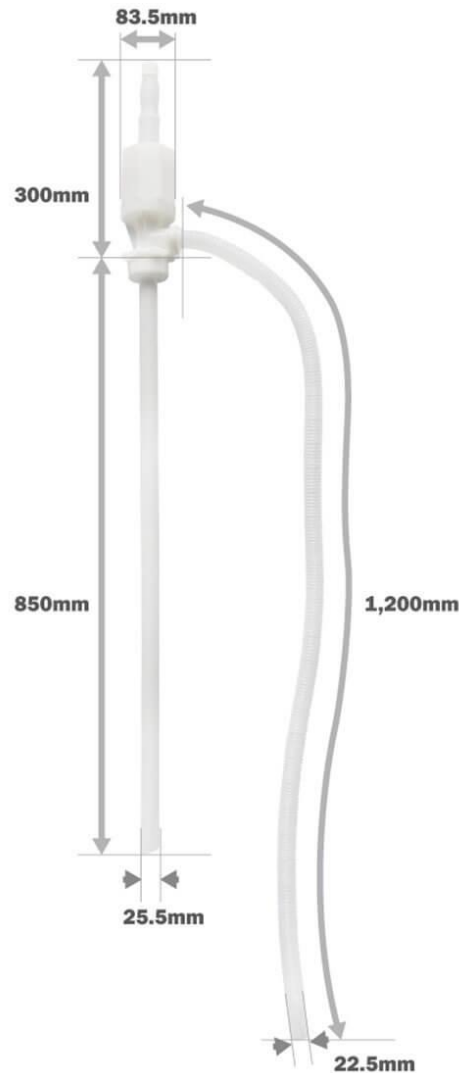

Applications:

Suction type : Manual up and down piston type / Heavy duty
 Applicable liquids : Gasoline, Kerosene, Diesel, Water, Windshield washer fluid, Brake cleaner, Thinner, Toluene, Nitric acid 35%, Hydrochloric acid 35%, Sulfuric acid 35%, Acetic acid 35%, Motor oil(Ex.5W31), Hydraulic oil(Ex.AW46), Lubricants, Chemical insecticides, Agricultural Chemicals, Non corrosive, Non toxic plastic material construction, Light-weight
 Depth adjustable with 30mm(1.20") long adaptor for standard 50.8mm(2") drum bung adaptor

Specifications:

Total length : 1,150 mm (45.3")
 Suction pipe length : 850 mm (33.5")
 Suction end outer dia. : 25.5 mm (1.0")
 Discharge hose length : About 1,200 mm (47.2")
 Discharge hose outer dia. : 22.5 mm (0.89")
 Head outer dia. : 83.5 mm (3.29")
 Delivery volume : About 21LPM(5.5GPM)
 Operating temperature : +5°C~40°C(41°F~104°F)
 Main material : P.E
 Net Weight/pc : About 390g (13.8Oz)

