


# WINDFLEX® 1500 PU new



## Heavy duty flexible hose in transparent polyurethane, reinforced with a galvanized steel spiral. Thick wall.


Heavy Standard. PU rated non flammable UL94 V2.

### APPLICATIONS

- Transport of abrasives : powders, granules, mud, sand, cement, gravel, etc.

### SECTORS OF ACTIVITY

- Construction
- Mines

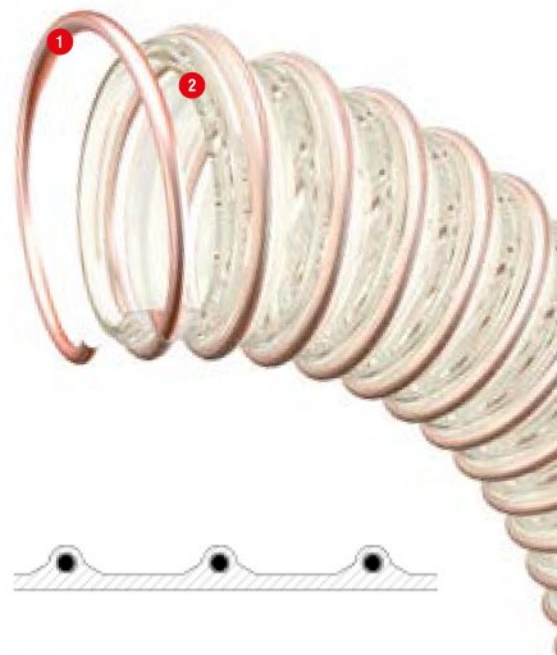

- 1 Metallic spiral
- 2 Transparent polyurethane thick wall



Marking ↓ WINDFLEX® 1500 PU ↓ Ø inn [Batch number]  
Made in France

### ADVANTAGES

Thick 100% polyurethane polyester wall; chosen for its resistance to abrasion; extruded wall with reinforced steel wire helix. This technique provides a smooth internal wall surface and excellent flexibility while maintaining extreme durability.

### CONNECTORS

Connectors with wire collars. Small diameters can be screwed into themselves. We recommend checking before assembly that the fittings cannot harm the inner wall.

### CHEMICAL RESISTANCE

See table pages 104 to 107 column C.

mm	+/- mm	mm	g/m	mbar	mm	Transparent
40	0/+2,0	1.5	440	700	60	available
50	0/+2,0	1.5	550	600	75	available
100	0/+2,0	1.5	1270	400	150	071234

### DELIVERY IN COILS

