

NOBELAIR® AS/R EN ISO 5359



60 bar



+60 -15 °C

Reinforced hose for medical gas. In accordance with EN ISO 5359 standards.

APPLICATIONS


Specially designed for transfer of medical gas.

SECTORS OF ACTIVITY

- Hospitals
- Ambulances



RESISTIVITY <math>< 10^6 \Omega/M</math>
COMPLIES WITH NF EN ISO 8031

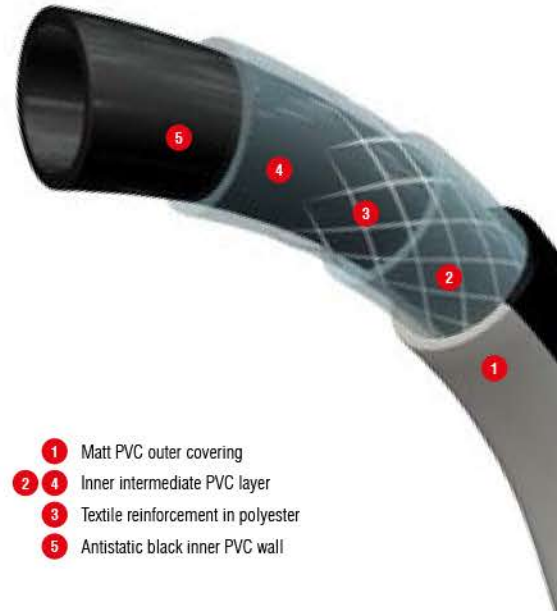

- 1 Matt PVC outer covering
- 2 Inner intermediate PVC layer
- 3 Textile reinforcement in polyester
- 4 Antistatic black inner PVC wall

Marking EN ISO 5359 ANTISTATIQUE [Medical gas type] [Batch number]

ADVANTAGES

NOBELAIR® AS/R EN ISO 5359 hose is a top of the range hose, linking comfort of use to resistance in the most arduous conditions. Its extremely flexible, lightweight and user friendly. Its considerable thickness ensures a retained profile.

The well balanced reinforcement provides it with excellent dimensional stability. The antistatic inner layer is a guarantee of safety if used in hazardous environments. This capability is permanent, obtained by the addition of carbon directly into the hose material.

CONNECTORS

WARNING

Metal connectors must be used to maintain electrical continuity: Quick connectors, barbed or serrated connectors. Swaged fittings can be used if they do not damage the hose.

CHEMICAL RESISTANCE

See table pages 104 to 107 column A.

	mm	+/- mm	mm	+/- mm	mm	g/m	bar	bar	mm	50 m	
Air	6.3	+/- 0,3	12.4	+/- 0,3	3	106	60	15	25	071292	black -> white
Oxygen	6.3	+/- 0,3	12.4	+/- 0,3	3	106	60	15	25	071291	white
Nitrous oxide	6.3	+/- 0,3	12.4	+/- 0,3	3	106	60	15	25	071290	blue
Empty	6.3	+/- 0,3	12.4	+/- 0,3	3	106	60	15	25	071289	yellow

