


PROPA-TRESS®

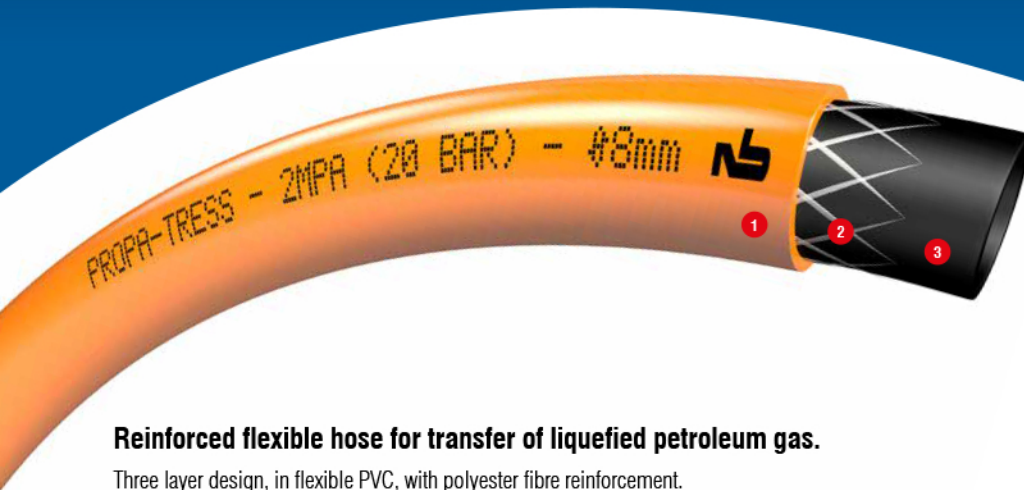

- 1 Flexible orange PVC coating
- 2 Textile reinforcement
- 3 Flexible black PVC core

Reinforced flexible hose for transfer of liquefied petroleum gas.

Three layer design, in flexible PVC, with polyester fibre reinforcement.

APPLICATIONS

Welding and associated techniques: Propane supply to blow torches, heated paint booths, heating: infra red heaters for livestock rearing buildings heating, gas transfer (air or industrial gases)

SECTORS OF ACTIVITY

Industry, agriculture, consumer market welding and camping equipment

Marking

PROPA-TRESS - 2 MPA (20bar) - Ø inn - [year of manufacturing]* - [Batch number]

* Year of production written in the marking is not a date of substitution.

ADVANTAGES

The qualities of the PVC compound provide the Propa-tress hose with flexibility, light weight, excellent resistance to ageing, and also render it impermeable to LPG. This hose withstands repeated bending and flattening.

CONNECTORS

Barbed or serrated connectors and worm drive or 'O' type clamps. Crimping is possible with non damaging connectors.

CHEMICAL RESISTANCE

See table pages 102 to 105 column A for outer layer, column B for inner layer.

	+/- mm		+/- mm		mm		g/m		bar		bar		mm	Orange	
														25 m	100 m
6.3	+/-0.4	12	+/-0.4	2.85	98	80	20	44	071366						
8	+/-0.5	14	+/-0.5	3	124	80	20	56							
9	+/-0.5	16	+/-0.5	3.5	164	80	20	63	071367						