

WINDFLEX® 600 PU AL












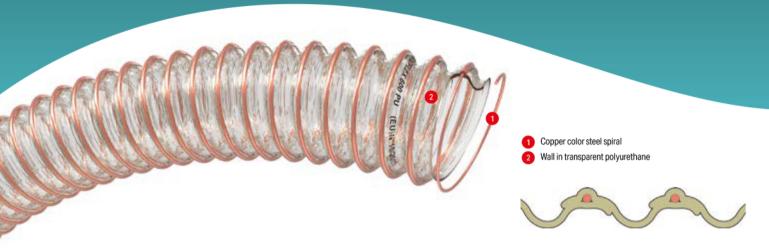

FLEXIBLE DUCTING IN POLYURETHANE ETHER WITH WALL REINFORCED WITH A GALVANIZED STEEL WIRE HELIX. SPRING QUALITY.

Potential equalisation, earthed at the ends of the steel spiral. PU rated non flammable UL94 V2. Halogen free.

APPLICATIONS

Suction of: Sawdust and chips, air and fumes, oil vapour extraction

2620

3000

3750

0.6

0.6

0.6

0/+6.0

20

20

10

216

247

309

SECTORS OF ACTIVITY

Wood industry

Windflex® 600 PU AL suitable for dried foodstuffs only.

Marking

Transparent

WINDFLEX*600 PU

√7 (EU) N°10/2011

√ Ø inn

[Batch number] Made in France

	Halispatelli		(4)	7.7				
	10 m	5 m		mbar	g/m		, mm	
	071205		25	250	250	0.6	0/+2,0	40
	071173		32	250	290	0.6	0/+2,0	51
	available*		37	200	340	0.6	0/+2,0	60
	available		43	140	430	0.6	0/+3,0	70
	available*		49	100	500	0.6	0/+3,0	80
	available*		56	100	550	0.6	0/+3,0	90
	070855		63	90	560	0.6	0/+4,0	102
2,6	070922		74	80	710	0.6	0/+4,0	120
	070856		78	80	750	0.6	0/+4,0	127
	available*		86	80	830	0.6	0/+4,0	140
	071207		94	60	900	0.6	0/+5,0	152
	071148		99	60	940	0.6	0/+5,0	160
	available		111	50	1060	0.6	0/+5,0	180
	available		125	50	1250	0.6	0/+5,0	203
	071450		157	50	1560	0.6	0/+5,0	254
	available		188	30	1880	0.6	0/+6,0	305

*on request: delivery time 4 weeks

available*

available*

available*

1,3 m

ADVANTAGES

WINDFLEX* 600 PU AL ducting is extremely flexible and due to the 100% ether-based polyurethane wall offers very good mechanical resistance. Extremely good abrasion resistance, flexibility and elasticity. Remarkable for its wide temperature range of use.

CONNECTORS

Connectors with wire collars. Small diameters can be screwed into themselves. We recommend checking before assembly that the fittings cannot harm the inner wall.

CHEMICAL RESISTANCE

See table pages 106 to 109 column C.

delivery in coils except compressed articles

WE HAVE THE POSSIBILITY TO MANUFACTURE OTHER LENGTHS AND DIAMETERS ON REQUEST. CONSULT US.