

Pompe Siphon manuelle multi-usage pour fût de 200 à 220 litres.

Cette pompe est adaptable sur bonde 2" pas du gaz. Si vous souhaitez l'adapter sur un autre filet, l'ajout d'un adaptateur sera nécessaire.


- Débit : 18,5 litres / minute.
- Longueur tube : 85 cm
- Longueur tube de refoulement: 120 cm
- Matière : PE


Applications :

Essence, kérosène, diesel, détergents, déodorants, acides doux, insecticides chimiques, savons, huiles légères, antigel, cires liquides, etc.

Ne pas utiliser pour transférer :

Acétone, benzène, creosol, éthyle, phénol, éthyle méthyle, liquide de soude caustique concentré, acide nitrique, acide hydro-chloridrique, acide sulfurique, toluène, etc.



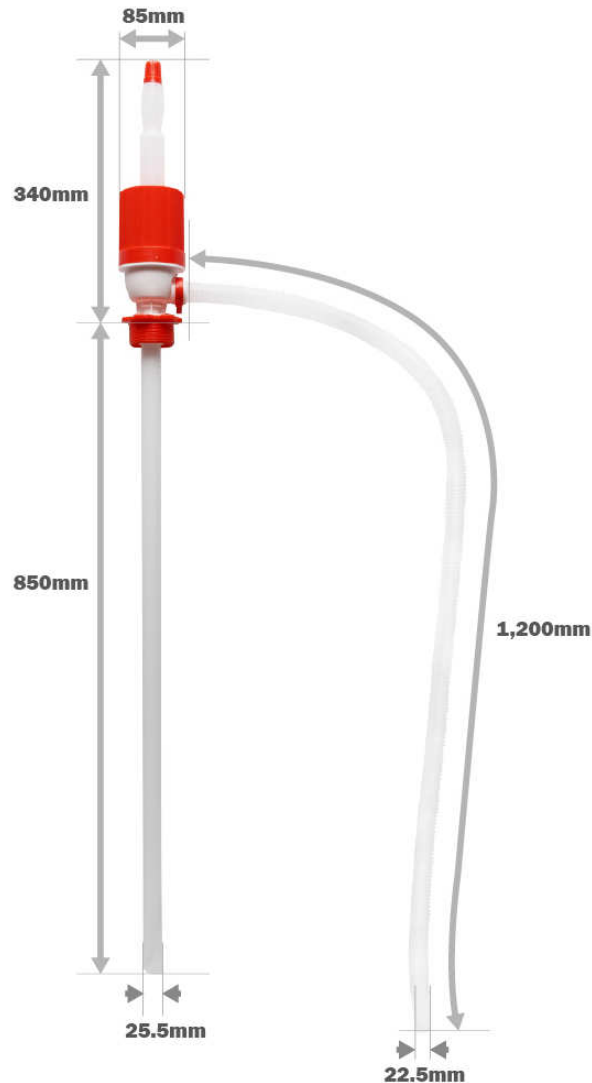

Applications :

Suction type : manual up and down piston type / Heavy duty
 Applicable liquids : Gasoline, Kerosene, Diesel, Light oils, Water, Chemical insecticides, Soaps, Detergents, Deodorants, Mild acids, Anti-freeze, Liquid waxes, etc.

Do not use for transferring Acetone, Benzene, Creosol, Ethyl, Phenol, Methyl ethyl, Concentrated Caustic soda liquid, Nitric acid, Hydrochloric acid, Sulfuric acid, Toluene, etc

Non corrosive, Non toxic plastic material construction, Light-weight
 Depth adjustable with 30mm long adapter for standard 2" drum bung adaptor

Depth adjustable with 30mm(1.20") long adaptor for standard 50.8mm(2") durm bung adaptor

Specifications :

Total Length : 1,190 mm (46.9")
 Suction tube Length : 850 mm (33.5")
 Suction tube Outer Dia. : 25.5 mm (1.0")
 Discharge Tube Length : About 1,200 mm (47.2")
 Discharge Tube Outer Dia. : 22.5 mm (0.89")
 Head Outer Dia. : 85 mm (3.35")
 Delivery Volume : About 18.5LPM (4.9GPM)
 Main Material : P.E
 Net Weight/pc : About 400g (14.1Oz)

